

32 x 32 DVI / HDMI / SDI Multi-format Modular Matrix; OMM-2500



Descriptions

OMM-2500 enables you to switch **up to 32 DVI /HDMI /SDI inputs to 32 digital displays** by using general PC software like Hyperlink terminal, telnet or web browser. Easy programming feature is accomplished in various manners such as manual input of front key or command line (ASCII or Binary code) input with various interfaces of RS-232, and TCP/IP and it offers you flexible installation with other video controllers or control software. The input and output cards are composed of 4 ports, therefore user can configures any input and output channels from 4X4 to 32X32 by plugging the cards into OMM-2500 mainframe. In case of Dual link DVI card (DDVI-2EI / DDVI-2EO), it is composed of 2 ports, therefore configuration for input and output channels are from 2x2 to 16x16. It equips electrical DVI, HDMI, SDI and optical DVI (SDVI-1FI/SDVI-1FO) input and output cards. Optical DVI input and output cards works perfectly with OPTICIS 1 fiber DVI extension module, DVFX-100 and maximum 1Km DVI signal extension can be managed with this combination. It also supports wide-range compatibility with respect to systems, consisting of various sources and various digital monitors. It has been designed not only to fully execute the DDC (Display Data Channel)/HDCP (High-bandwidth Digital Content Protection) function (Electrical DVI and HDMI cards only), but also to have users designate EDID to inputs for wide compatibility. Embedded video signal generator and diagnostic function help the user solve the installation problem with easy and optional quad multi-viewer card saves the installation cost.

Key Features

- **Configurable up to 32 x 32** electrical and optical input/output.
 - Minimum configuration is 4 x 4.
 - Supports **HDMI / SDI /DL DVI** input and output as an option.
 - Dual link DVI supports from 2 x 2 to 16 x16 input / output.
- Provides Touch LCD and a user-friendly graphic interface.
- Supports DDC/HDCP (Electrical DVI and HDMI cards only).
- Provides various control methods (RS-232, TCP/IP, WEB, Key input)
- Equips **multi-viewer function (QDVI-O)**.
- Provides **Diagnostic function** for quick trouble shooting.
- Has **Reference video output and monitoring output** for easy installation.
- Handles DVI signal up to **1Km** over Multi-mode fiber with fiber optic cards, SDVI-1FI, SDVI-1FO.
- Offers **EDID management** function.
 - Default Mode
 - Auto Detect Mode
 - Output Copy Mode
 - Resolution List Mode
- Provides Preset mode to save and load the current routings.
- Certifies with CE


Applications

- Medical imaging system
- Video wall system
- Digital signage
- Military / Aerospace

Technical Specifications

Section	Basic Spec.		Section	Basic Spec.	
Video resolution	Main VESA resolution & Main vertical frequency from 640x480 up to WUXGA (1920x1200), @60Hz WQXGA (2560x1600), @60Hz (Dual link card only)		Reference video output	9 output video resolutions with 16 patterns	
HDCP	Support : Electric DVI, Dual link DVI, HDMI Non-support : Optical DVI, SDI		Diagnosis	1) In/Output Link condition 2) source & display Link condition 3) EDID, HDCP information by the remote control through the Web	
Video format conversion	Video format conversion without scaling function		Configuration	Save & Restore for Current connection & Control condition by internal memory	
Multi-viewer	With additional output card (QDVI-O), Quad view & picture in picture (PIP)		EDID management	1) Default Mode 2) Auto Detect Mode 3) Output Copy Mode 4) Resolution List Mode	
In/Output	32 x 32 (4 ports in one in/output card) 16 x 16 (2 ports in one in/output card)		Color	Black	
Switching speed	< 1 sec (If No format searching by Display)		Touch LCD	Pressure type	
			In/Output card Spec.		
Size	440 x 440 x 1311mm (WDH), (7U, 19")		Section	Model name	In/Output port
			Single DVI input	SDVI-4EI	4 x DVI-D receptacle
Weight	< 15Kg (net weight with dual powers)		Single DVI output	SDVI-4EO	4 x DVI-D receptacle
			Dual DVI input	DDVI-2EI	2 x DVI-D receptacle
			Dual DVI output	DDVI-2EO	2 x DVI-D receptacle
			HDMI input	HDMI-4EI	4 x HDMI receptacle
			HDMI output	HDMI-4EO	4 x HDMI receptacle
Cooling system	Cooling fan (Forced cooling system)		SDI input	SDI-4EI	4 x SDI receptacle
			SDI output	SDI-4EO	4 x SDI receptacle
Certificate	CE		Quad output	QDVI-O	1x DVI-D receptacle + 1x SC receptacle
			1 fiber DVI input	SDVI-1FI	4 x SC receptacle
Control system	Front-key, Touch LCD, RS-232, TCP/IP, Web		1fiber DVI output	SDVI-1FO	4 x SC receptacle
			Operating condition	Temperature (°C)	10 ~ 40
Relative humidity (%)	+30~ +75	Relative humidity (%)		+10~ +95	
Atmospheric Pressure (hPa)	700 ~ 1060	Atmospheric Pressure (hPa)		500 ~1060	

Drawing

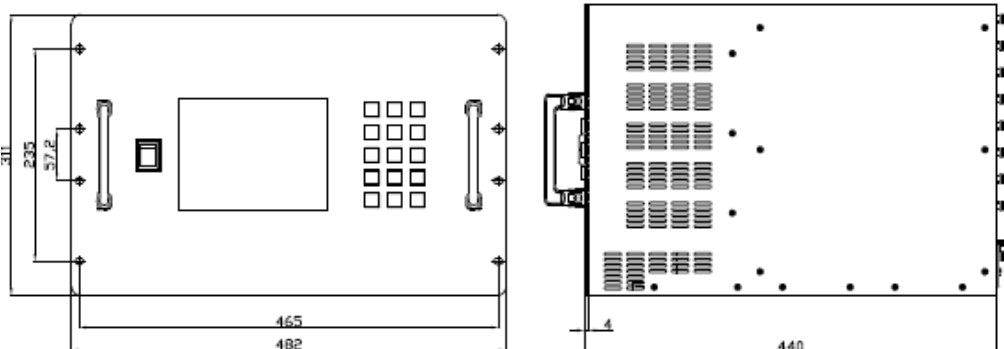

OPTICIS HQ

Opticis Co., Ltd.
 # 16Fl, Kins Tower Jeongja 331,
 8 Sungnam-daero, Bundang-gu
 Sungnam-si, Gyunggi-do, 463-782
 South Korea
 Te l: +82 (31) 719-8033
 Fax: +82 (31) 719-8032
www.opticis.com
 tosales@opticis.com